

Ordering information for XT3 UL/CSA Circuit breakers



XT3 225A TMF - Fixed (F) - 3 poles - Front terminals (F) - UL/CSA

Thermal magnetic trip unit			Int Rtn ^g N (480 V) 25kA	S 35kA
Type In		I	Catalog number	Catalog number
TMF	60	600	XT3NU3060AFF000XXX	XT3SU3060AFF000XXX
	70	700	XT3NU3070AFF000XXX	XT3SU3070AFF000XXX
	80	800	XT3NU3080AFF000XXX	XT3SU3080AFF000XXX
	90	900	XT3NU3090AFF000XXX	XT3SU3090AFF000XXX
	100	1000	XT3NU3100AFF000XXX	XT3SU3100AFF000XXX
	110	1100	XT3NU3110AFF000XXX	XT3SU3110AFF000XXX
	125	1250	XT3NU3125AFF000XXX	XT3SU3125AFF000XXX
	150	1500	XT3NU3150AFF000XXX	XT3SU3150AFF000XXX
	175	1750	XT3NU3175AFF000XXX	XT3SU3175AFF000XXX
	200	2000	XT3NU3200AFF000XXX	XT3SU3200AFF000XXX
	225	2250	XT3NU3225AFF000XXX	XT3SU3225AFF000XXX

XT3 225A TMF - Fixed (F) - 4 poles - Front terminals (F) - UL/CSA

Thermal magnetic trip unit			Int Rtn ^g N (480 V) 25kA	S 35kA
Type In		I	Catalog number	Catalog number
TMF	60	600	XT3NU4060AFF000XXX	XT3SU4060AFF000XXX
	70	700	XT3NU4070AFF000XXX	XT3SU4070AFF000XXX
	80	800	XT3NU4080AFF000XXX	XT3SU4080AFF000XXX
	90	900	XT3NU4090AFF000XXX	XT3SU4090AFF000XXX
	100	1000	XT3NU4100AFF000XXX	XT3SU4100AFF000XXX
	110	1100	XT3NU4110AFF000XXX	XT3SU4110AFF000XXX
	125	1250	XT3NU4125AFF000XXX	XT3SU4125AFF000XXX
	150	1500	XT3NU4150AFF000XXX	XT3SU4150AFF000XXX
	175	1750	XT3NU4175AFF000XXX	XT3SU4175AFF000XXX
	200	2000	XT3NU4200AFF000XXX	XT3SU4200AFF000XXX
	225	2250	XT3NU4225AFF000XXX	XT3SU4225AFF000XXX

XT3 225A MCP (MA) - Fixed (F) - 3 poles - Front terminals (F) - UL/CSA

Magnetic trip unit			Int Rtn ^g (480 V)	S 35 kA
Type	In	I	Catalog number	
MCP	100	600...1200	XT3SU3100MFF000XXX	
	110	660...1320	XT3SU3110MFF000XXX	
	125	750...1500	XT3SU3125MFF000XXX	
	150	900...1800	XT3SU3150MFF000XXX	
	200	1200...2400	XT3SU3200MFF000XXX	

XT3 225A switch - Fixed (F) - 3 poles - Front terminals (F) - UL/CSA

No trip unit			Int Rtn ^g (480 V)	N 25kA	S 35kA
Type	In	Mag. Override		Catalog number	Catalog number
XT3 - D	225	2250		XT3NU3225DFF000XXX	XT3SU3225DFF000XXX

XT3 225A switch - Fixed (F) - 4 poles - Front terminals (F) - UL/CSA

No trip unit			Int Rtn ^g (480 V)	N 25kA	S 35kA
Type	In	Mag. Override		Catalog number	Catalog number
XT3 - D	225	2250		XT3NU4225DFF000XXX	XT3SU4225DFF000XXX


Approximate dimensions

Tmax XT3 - Installation for fixed circuit breaker

5

Mounting on the backplate


- Captions
- 1 Insulating plate compulsory
 - 2 Overall dimension of optional wiring ducts
 - 3 25mm insulating barriers between phases (compulsory) provided
 - 4 Front carter compulsory for through door of the panel $\leq 25\text{mm}/0,98''$

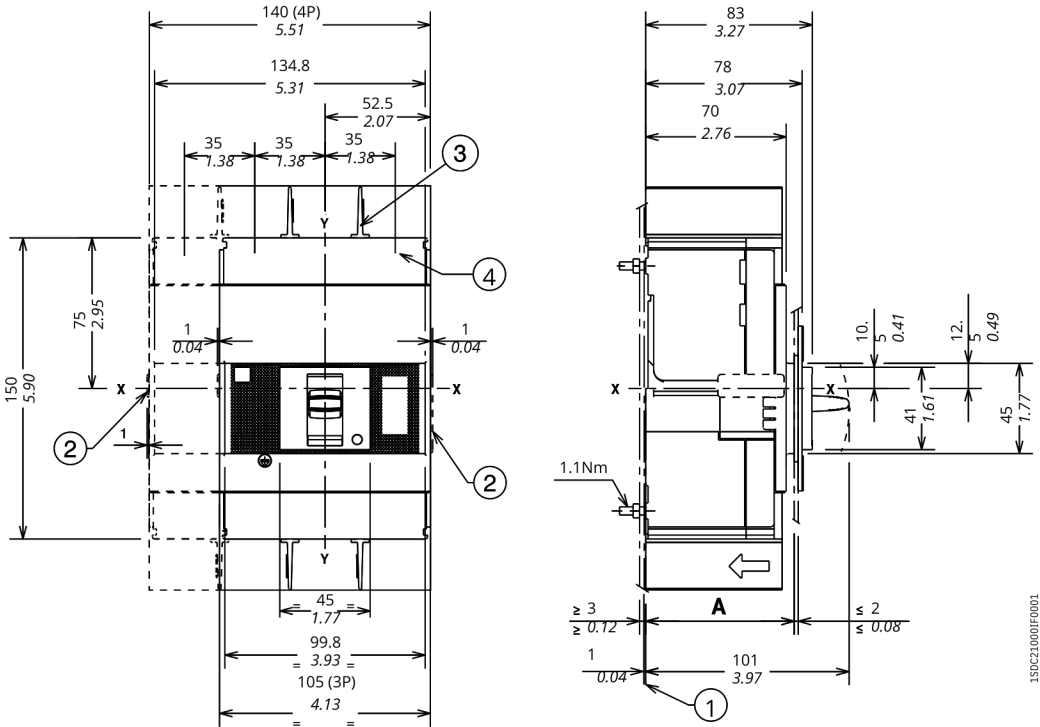


Mounting on DIN EN 50022 rail



- Captions
- 1 Mounting bracket
 - 2 Optional wiring ducts
 - 3 Optional front cover for DIN rail
 - 4 25mm insulating barriers between phases (compulsory) provided

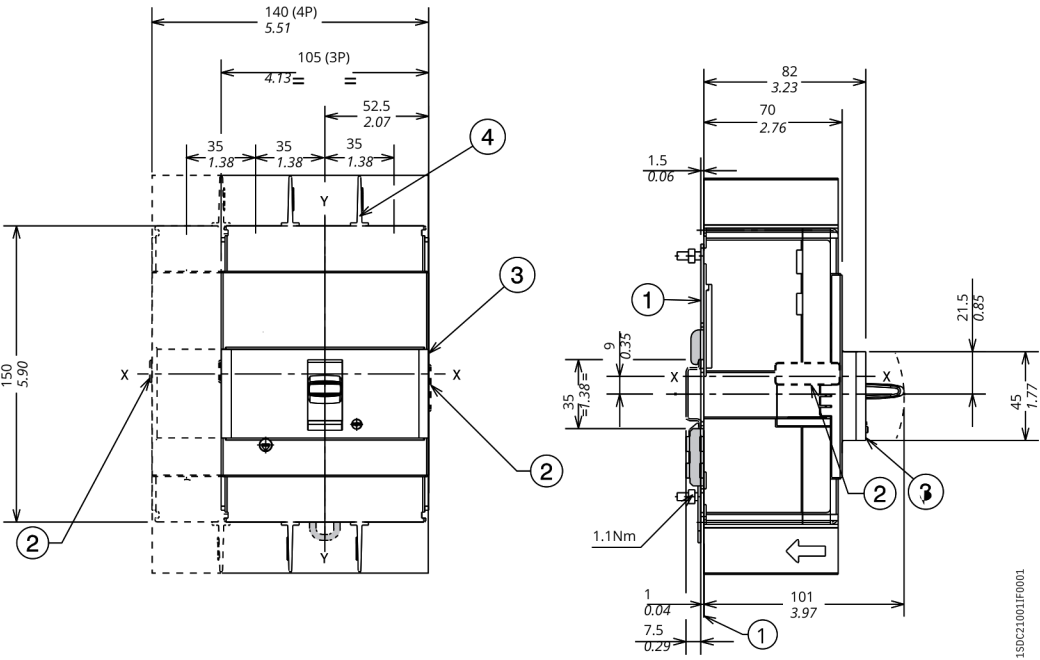


Drilling template

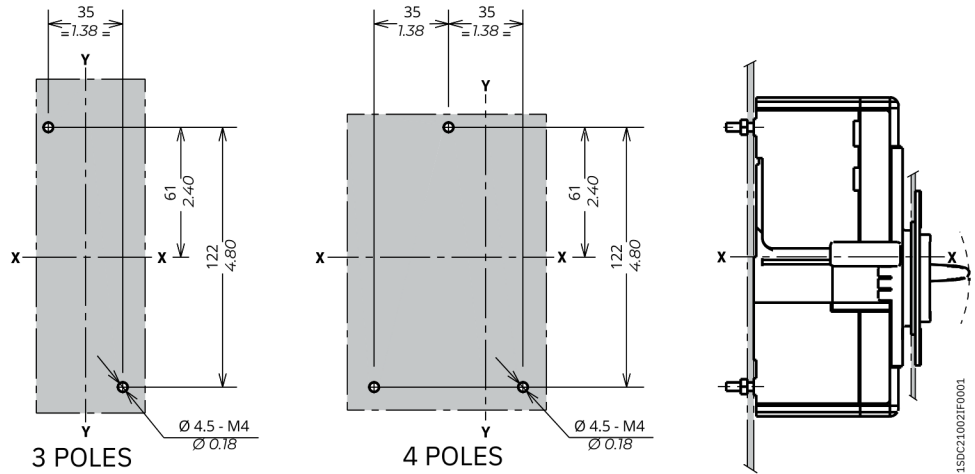

Captions

- 1 Flange for fixed circuit breaker III
- 2 Flange for fixed circuit breaker IV
- 3 Flange for circuit breaker with direct motor operator MOD
- 4 Flange for circuit breaker with direct rotary handle (RHD)
- 5 Optional flange

Flanges

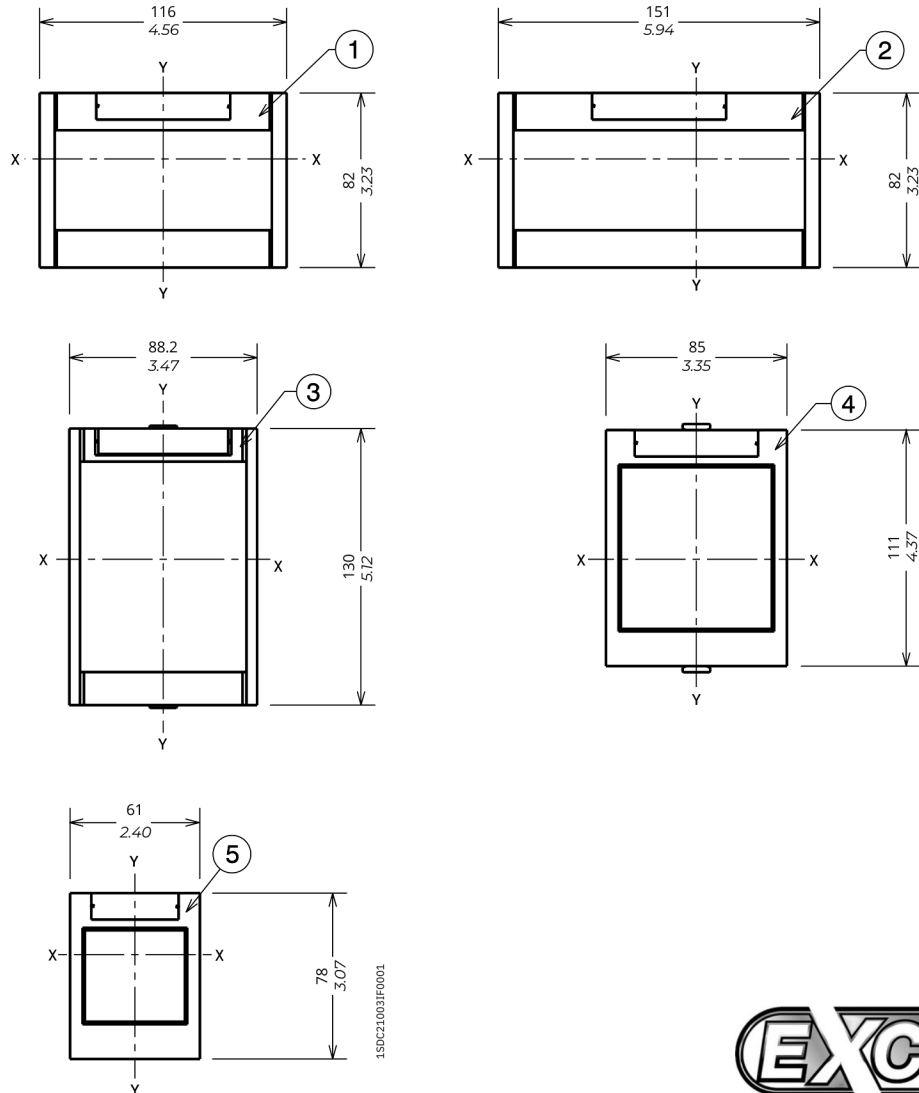


Approximate dimensions


Tmax XT3 - Installation for fixed circuit breaker

Drilling templates for compartment door

With standard flange

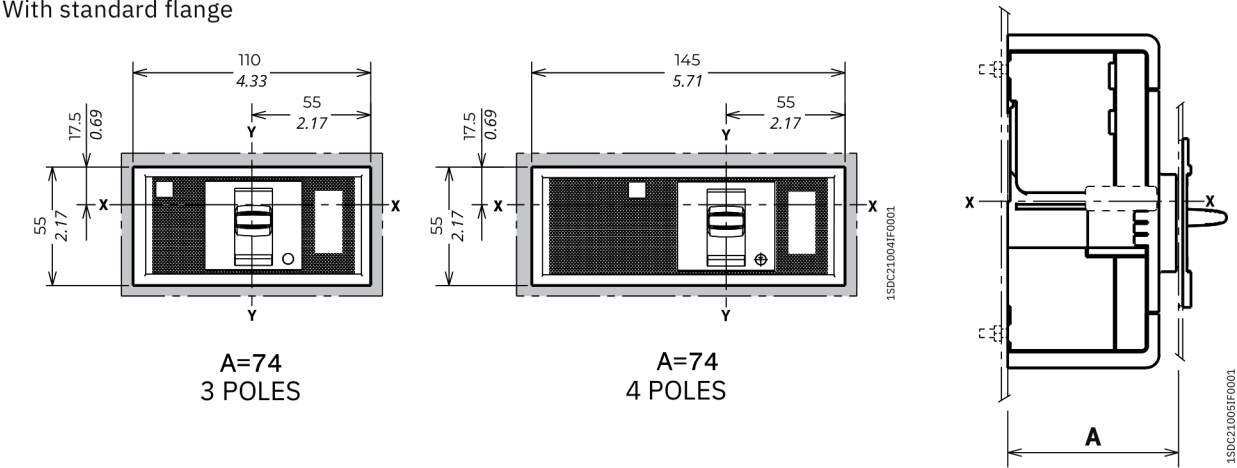

Without flange

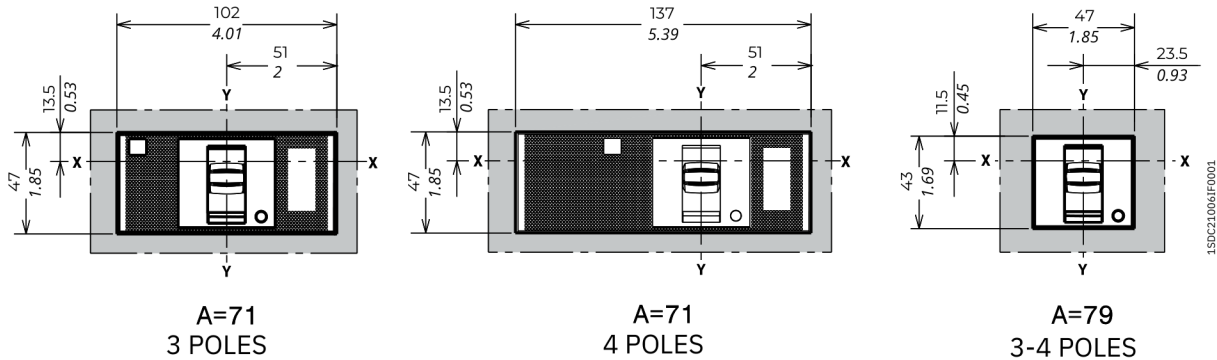

With optional flange

Caption
1 Optional flange

